

VISTAS ELECTRICALS LLP

LED LIGHTING DIVISION AND R & D CENTER

+91 7982 34 1090, 8585 96 7702, 9810012248

vistaselectricals@gmail.com

www.vistaselectricals.com

Follow us at



BRIGHT KING
digitize your light...

ABOUT US

We, at VISTAS GROUP, believe in the advent of an era, where the Indian market demands a higher degree of competence, safety, and self-sustainability. Bright King is an initiative to promote the revolution of LED lighting technology over conventional lighting systems.

BRIGHT KING indoor spaces portfolio encompasses a wide range of lighting applications. From delivering optimal and comforting lighting solutions for your homes, to bringing robust and sturdy applications for your industrial needs, we excel at all.

We, not only deliver for your indoor spaces, but also offer a complete range of outdoor spaces and street lighting solutions.

Our Mission is to deliver safe, durable, and economical lighting systems to every door step. Our drive to an unwavering commitment on promoting ONLY BIS Certified "Made in India" products and continuous product improvement through a State of the art R&D Lab, using the best of industry components in manufacturing, tested on the best of the testing equipments, is what truly empowers our mission.

Come, let us join hands in illuminating the path to India's new dawn...



Better life.
With electricity.

Manufacturing Facilities



LCR Meter



Digital Storage Oscilloscope



LED Driver Tester



Surge Generator



SMT Machine




Spectrometer with Sphere



Residential

Bright king residential luminaire selection is extremely wide and designed to cover all professional needs in general lighting at home as well as in public premises.




Public premises

Efficient and functional lighting enhances productivity and improves performance where ever we work. Bright king public premises luminaires can be designed and installed to make the best possible lighting for each situation.



Industrial

Bright king solves industrial lighting needs. Paper mill or parking hall; our efficient, wide and light technically superior portfolio suits almost everywhere.



Outdoor

Bright king outdoor luminaire selection is energy efficient, long lasting and economically sustainable. We know how to light parks, squares as well as yards

LIGHT UP YOUR WORLD

Our home reflects your ambitions and aspirations. Let there be the right manifestation with right choice of lights. Bright King takes utmost care in ensuring all its products conform to the highest international standards. Bright King Lighting brings an array of options in varied sizes and shapes, fitting different budgets and pockets as well as aspirations.


Elite Series

(SLIM LED PANEL)



Elite Series

(SLIM LED PANEL)

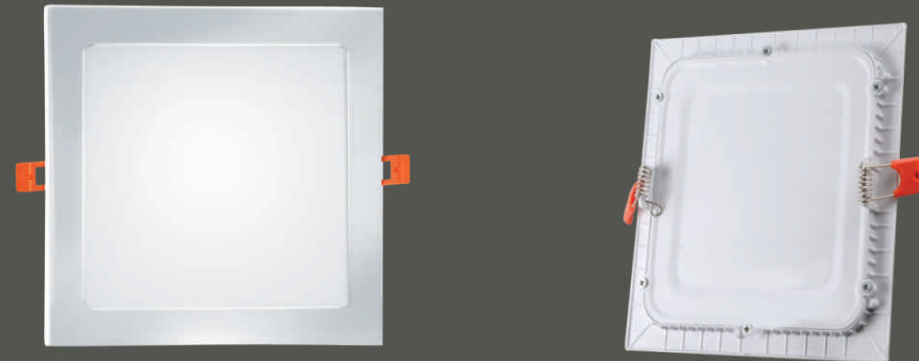

TECHNICAL SPECIFICATION

AVAILABLE WATTAGE	6W	9W	12W	15W	18W	22W
SIZE	120mm	120mm	170mm	170mm	225mm	225mm
CUT OUT	105mm	105mm	160mm	160mm	210mm	210mm
LUMEN	600lm	900lm	1200lm	1500lm	1800lm	2200lm
DRIVER EFFICIENCY	>90%					
SURGE PROTECTION	>2.5KV					
INPUT VOLTAGE	100-300 Vac					





ELITE
Series
SURFACE PANEL



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	6W	9W	12W	15W	18W	22W
SIZE	120mm	120mm	170mm	170mm	225mm	225mm
LUMEN	600lm	900lm	1200lm	1500lm	1800lm	2200lm
DRIVER EFFICIENCY	>90%					
SURGE PROTECTION	>2.5KV					
INPUT VOLTAGE	100-300 Vac					

ALEXA
Series
(ULTRA SLIM LED PANEL)



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	9W	16W
SIZE	120mm	175mm
CUT OUT	100mm	150mm
LUMEN	990lm	1760lm
DRIVER EFFICIENCY	>90%	
SURGE PROTECTION	2.5KV	
INPUT VOLTAGE	AC 100-300 V	

TRIM
Series
(SURFACE LED PANEL)



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	8W	15W	22W
SIZE	90mm	145mm	175mm
CUT OUT	65mm	115mm	145mm
LUMEN	800lm	1500lm	2200lm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>2.5KV		
INPUT VOLTAGE	100-300 Vac		



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	8W	15W	22W
SIZE	90mm	145mm	175mm
LUMEN	800lm	1500lm	2200lm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>2.5KV		
INPUT VOLTAGE	100-300 Vac		

GLOBE Series

(PLASTIC LED PANEL)



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	6W	12W	18W
SIZE	95mm	130mm	160mm
CUT OUT	75mm	100mm	130mm
LUMEN	600lm	1200lm	1800lm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>2.5KV		
INPUT VOLTAGE	100-300 Vac		



GLOBE SURFACE Series



TECHNICAL
SPECIFICATION

AVAILABLE WATTAGE	12W	18W
SIZE	130mm	160mm
LUMEN	1200lm	1800lm
DRIVER EFFICIENCY	>90%	
SURGE PROTECTION	>2.5KV	
INPUT VOLTAGE	100-300 Vac	



LED
CONCEALED
Series

PETER 3 W



TECHNICAL
SPECIFICATION

MODEL	PETER
WATTAGE	3W
CUT OUT	50mm
SIZE	85mm
BODY TYPE	Plastic
LUMEN	300lm
SURGE PROTECTION	>1.5KV
INPUT VOLTAGE	160-265 Vac

3W MASTER
SPOT COB



TECHNICAL
SPECIFICATION

WATTAGE	3W
SIZE	42mm
CUTOUT	30mm
LUMEN	300lm
DRIVER EFFICIENCY	>90%
SURGE PROTECTION	>2.5KV
INPUT VOLTAGE	100-280 Vac

LED
CONCEALED
Series



BREZZA



JOY



NEXA



ADORE

Available in driver on board technology & with driver also.

TECHNICAL
SPECIFICATION

MODEL	ADORE	BREZZA	NEXA	JOY
WATTAGE	6W	6W	6W	6W
CUT OUT	75mm	75mm	75mm	75mm
SIZE	105mm	110mm	110mm	105mm
BODY TYPE	Plastic	Plastic	Plastic	Plastic
LUMEN	600lm	600lm	600lm	600lm
SURGE PROTECTION	>1.5KV			
INPUT VOLTAGE	160-265 Vac			

LED CONCEALED LIGHT



CANDY 6W



CANDY 12W



TECHNICAL SPECIFICATION

MODEL	CANDY	CANDY
WATTAGE	6W	12W
CUT OUT	50mm	50/75mm
SIZE	85mm	140mm
BODY TYPE	Plastic	Plastic
LUMEN	600lm	1200lm
SURGE PROTECTION	>2.5KV	
INPUT VOLTAGE	100-300 Vac	



First on WW



Second on PW



Third on CW



LED CONCEALED METAL LIGHT



EURO

RIVA Metal Concealed Light 6 W



Available in driver on board technology & with driver also.

TECHNICAL SPECIFICATION

MODEL	EURO	RIVA
WATTAGE	6W	6W
CUT OUT	75mm	75mm
SIZE	110mm	110mm
BODY TYPE	Aluminium	Metal
LUMEN	600lm	600lm
SURGE PROTECTION	>1.5KV	
INPUT VOLTAGE	160-265 Vac	



T-BULB
Series



WIDER LIGHT SPREAD

TECHNICAL
SPECIFICATION

WATTAGE	10W
BEAM ANGLE	>120
LUMEN	1200lm
DRIVER EFFICIENCY	>90%
SURGE PROTECTION	>2.5KV
INPUT VOLTAGE	100-300 Vac

LED BULB
Series



TECHNICAL
SPECIFICATION

WATTAGE	5W	7W	9W	12W	15W	18W	24W	30W	50W
SIZE	57mm	57mm	57mm	65mm	65mm	75mm	75mm	100mm	120mm
LUMEN	500lm	700lm	900lm	1200lm	1500lm	1800lm	2400lm	3000lm	5000lm
DRIVER EFFICIENCY	>90%								
SURGE PROTECTION	>2.5KV								
INPUT VOLTAGE	140-270 Vac								





TRACK LIGHT




TECHNICAL SPECIFICATION

WATTAGE	20W	30W	40W
BEAM ANGLE	50°	50°	50°
LUMEN	2300	3450lm	4600lm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>4KV		
INPUT VOLTAGE	100-280 Vac		

COMMERCIAL PANEL LIGHTS Series

COMMERCIAL PANEL LIGHTS Series

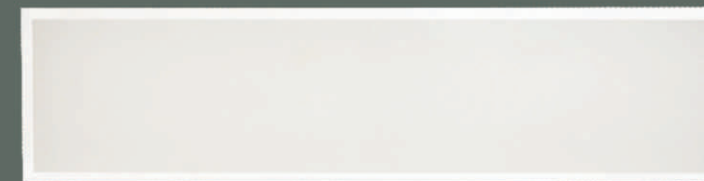

300X1200MM



600X600MM



SKY BRIGHT 48 Watts Backlit Panel

MODEL	2 X 2	1 X 4
WATTAGE	48W	
SIZE	600 X 600mm	
CUT OUT	585 X 585mm	
LUMEN	5000lm	
DRIVER EFFICIENCY	>90%	
SURGE PROTECTION	>4KV	
INPUT VOLTAGE	100-280 Vac	
ANGLE	120	
	WITH ISOLATED DRIVER	

PROTECTION

- Over Voltage Protection
- Short Circuit Protection
- Open Circuit Protection
- Surge Protection= 4kv IEC 61000-4-5

TECHNICAL SPECIFICATION





LED TUBE LIGHT Series



PLATINUM



GLAIR



RAINBOW



TECHNICAL SPECIFICATION


WATTAGE	5W	10W	20W	26W	36W
SIZE	1 Feet	2 Feet	4 Feet	4 Feet	4 Feet
BODY TYPE	Plastic	Plastic	Aluminium	Aluminium	Aluminium
LUMEN	525lm	945lm	2100lm	2730lm	3780lm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>2.5KV				
INPUT VOLTAGE	100-280 Vac				



LINEAR
PROFILE



LINEAR
PROFILE



LINEAR
PROFILE

TECHNICAL
SPECIFICATION

WATTAGE	36W	36W	54W	36W	36W
SIZE	35 x 35	50 x 35	75 x 35	50 x 70	60 x 80
LUMEN	3780lm	3780lm	5670lm	3780lm	3780lm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>4KV				
INPUT VOLTAGE	100-280 Vac				





**LIGHT IS
FREEDOM**

LIGHT IS
FREEDOM



LINEO
GOLD
FINISH

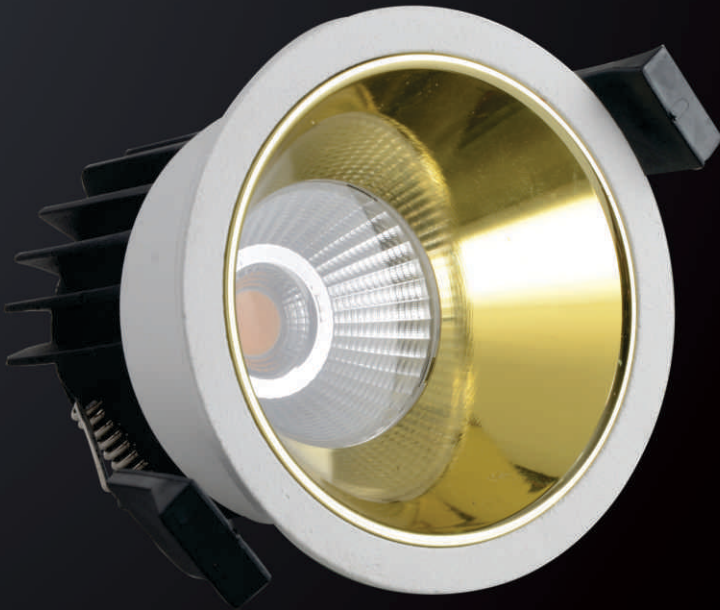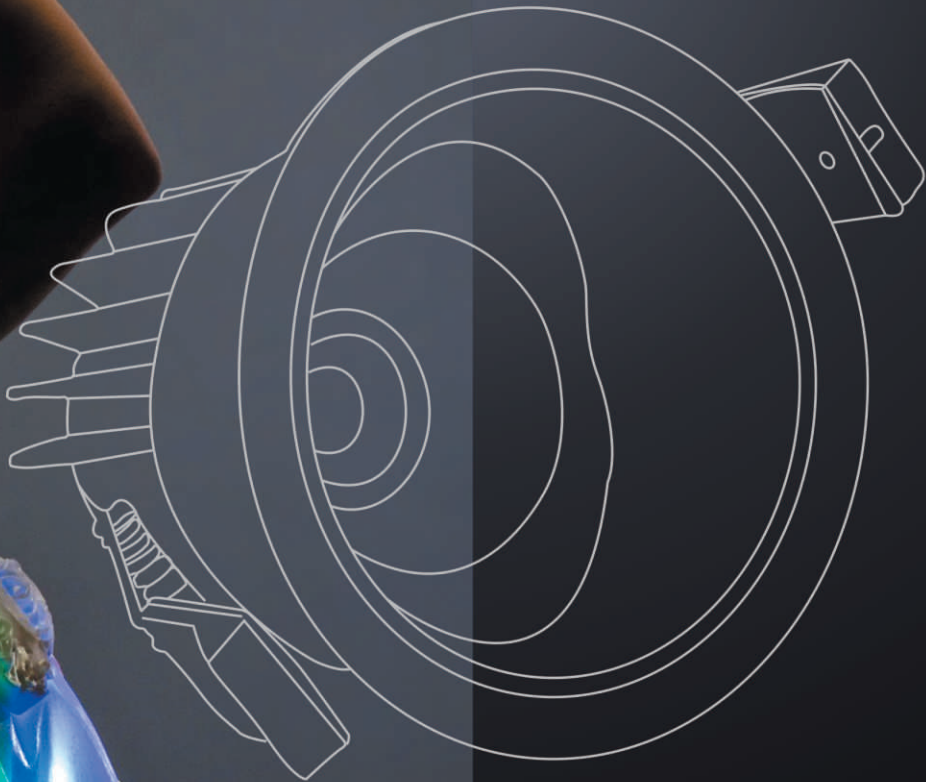

TECHNICAL
SPECIFICATION

WATTAGE	6W	10W	16W
CUTOUT	40mm	40mm	60mm
SIZE	52mm	52mm	75mm
LUMEN	720lm	1200lm	1920lm
BODY COLOR	Chrome / Gold / Matt Black / White		
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>2.5KV		
INPUT VOLTAGE	100-300 Vac		





TECHNICAL
SPECIFICATION

WATTAGE	3W	6W	12W	20W
CUTOUT	40mm	40mm	60mm	60mm
SIZE	52mm	52mm	75mm	90mm
LUMEN	300lm	600lm	1200lm	2000lm
BODY COLOR	White			
DRIVER EFFICIENCY	>90%			
SURGE PROTECTION	>2.5KV			
INPUT VOLTAGE	100-300 Vac			



TECHNICAL
SPECIFICATION

WATTAGE	3W	6W	9W	16W	24W	30W	40W
CUTOUT	50mm	66mm	66mm	86mm	114mm	134mm	134mm
SIZE	65mm	84mm	84mm	109mm	136mm	160mm	160mm
BEAM ANGLE	60	60	60	60	60	60	60
LUMEN	360lm	720lm	1080lm	1920lm	2880lm	3600lm	4800lm
DRIVER EFFICIENCY	>90%						
SURGE PROTECTION	>2.5KV	>2.5KV	>2.5KV	>2.5KV	>4KV	>4KV	>4KV
INPUT VOLTAGE	100-300 Vac	100-300 Vac	100-300 Vac	100-300 Vac	100-280 Vac	100-280 Vac	100-280 Vac



LED OUTDOOR LIGHT




POPULAR Series

WATTAGE	30W	50W	70W	100W	150W	200W
LUMEN	3600lm	6000lm	8400lm	12000lm	18000lm	24000lm
DRIVER EFFICIENCY	>90%					
SURGE PROTECTION	>5KV					
INPUT VOLTAGE	100-280 Vac					



MAX Series

WATTAGE	30W	50W	70W	100W	150W
LUMEN	3600lm	6000lm	8400lm	12000lm	18000lm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>6KV				
INPUT VOLTAGE	100-280 Vac				
IP	IP66				
ANGLE	120				

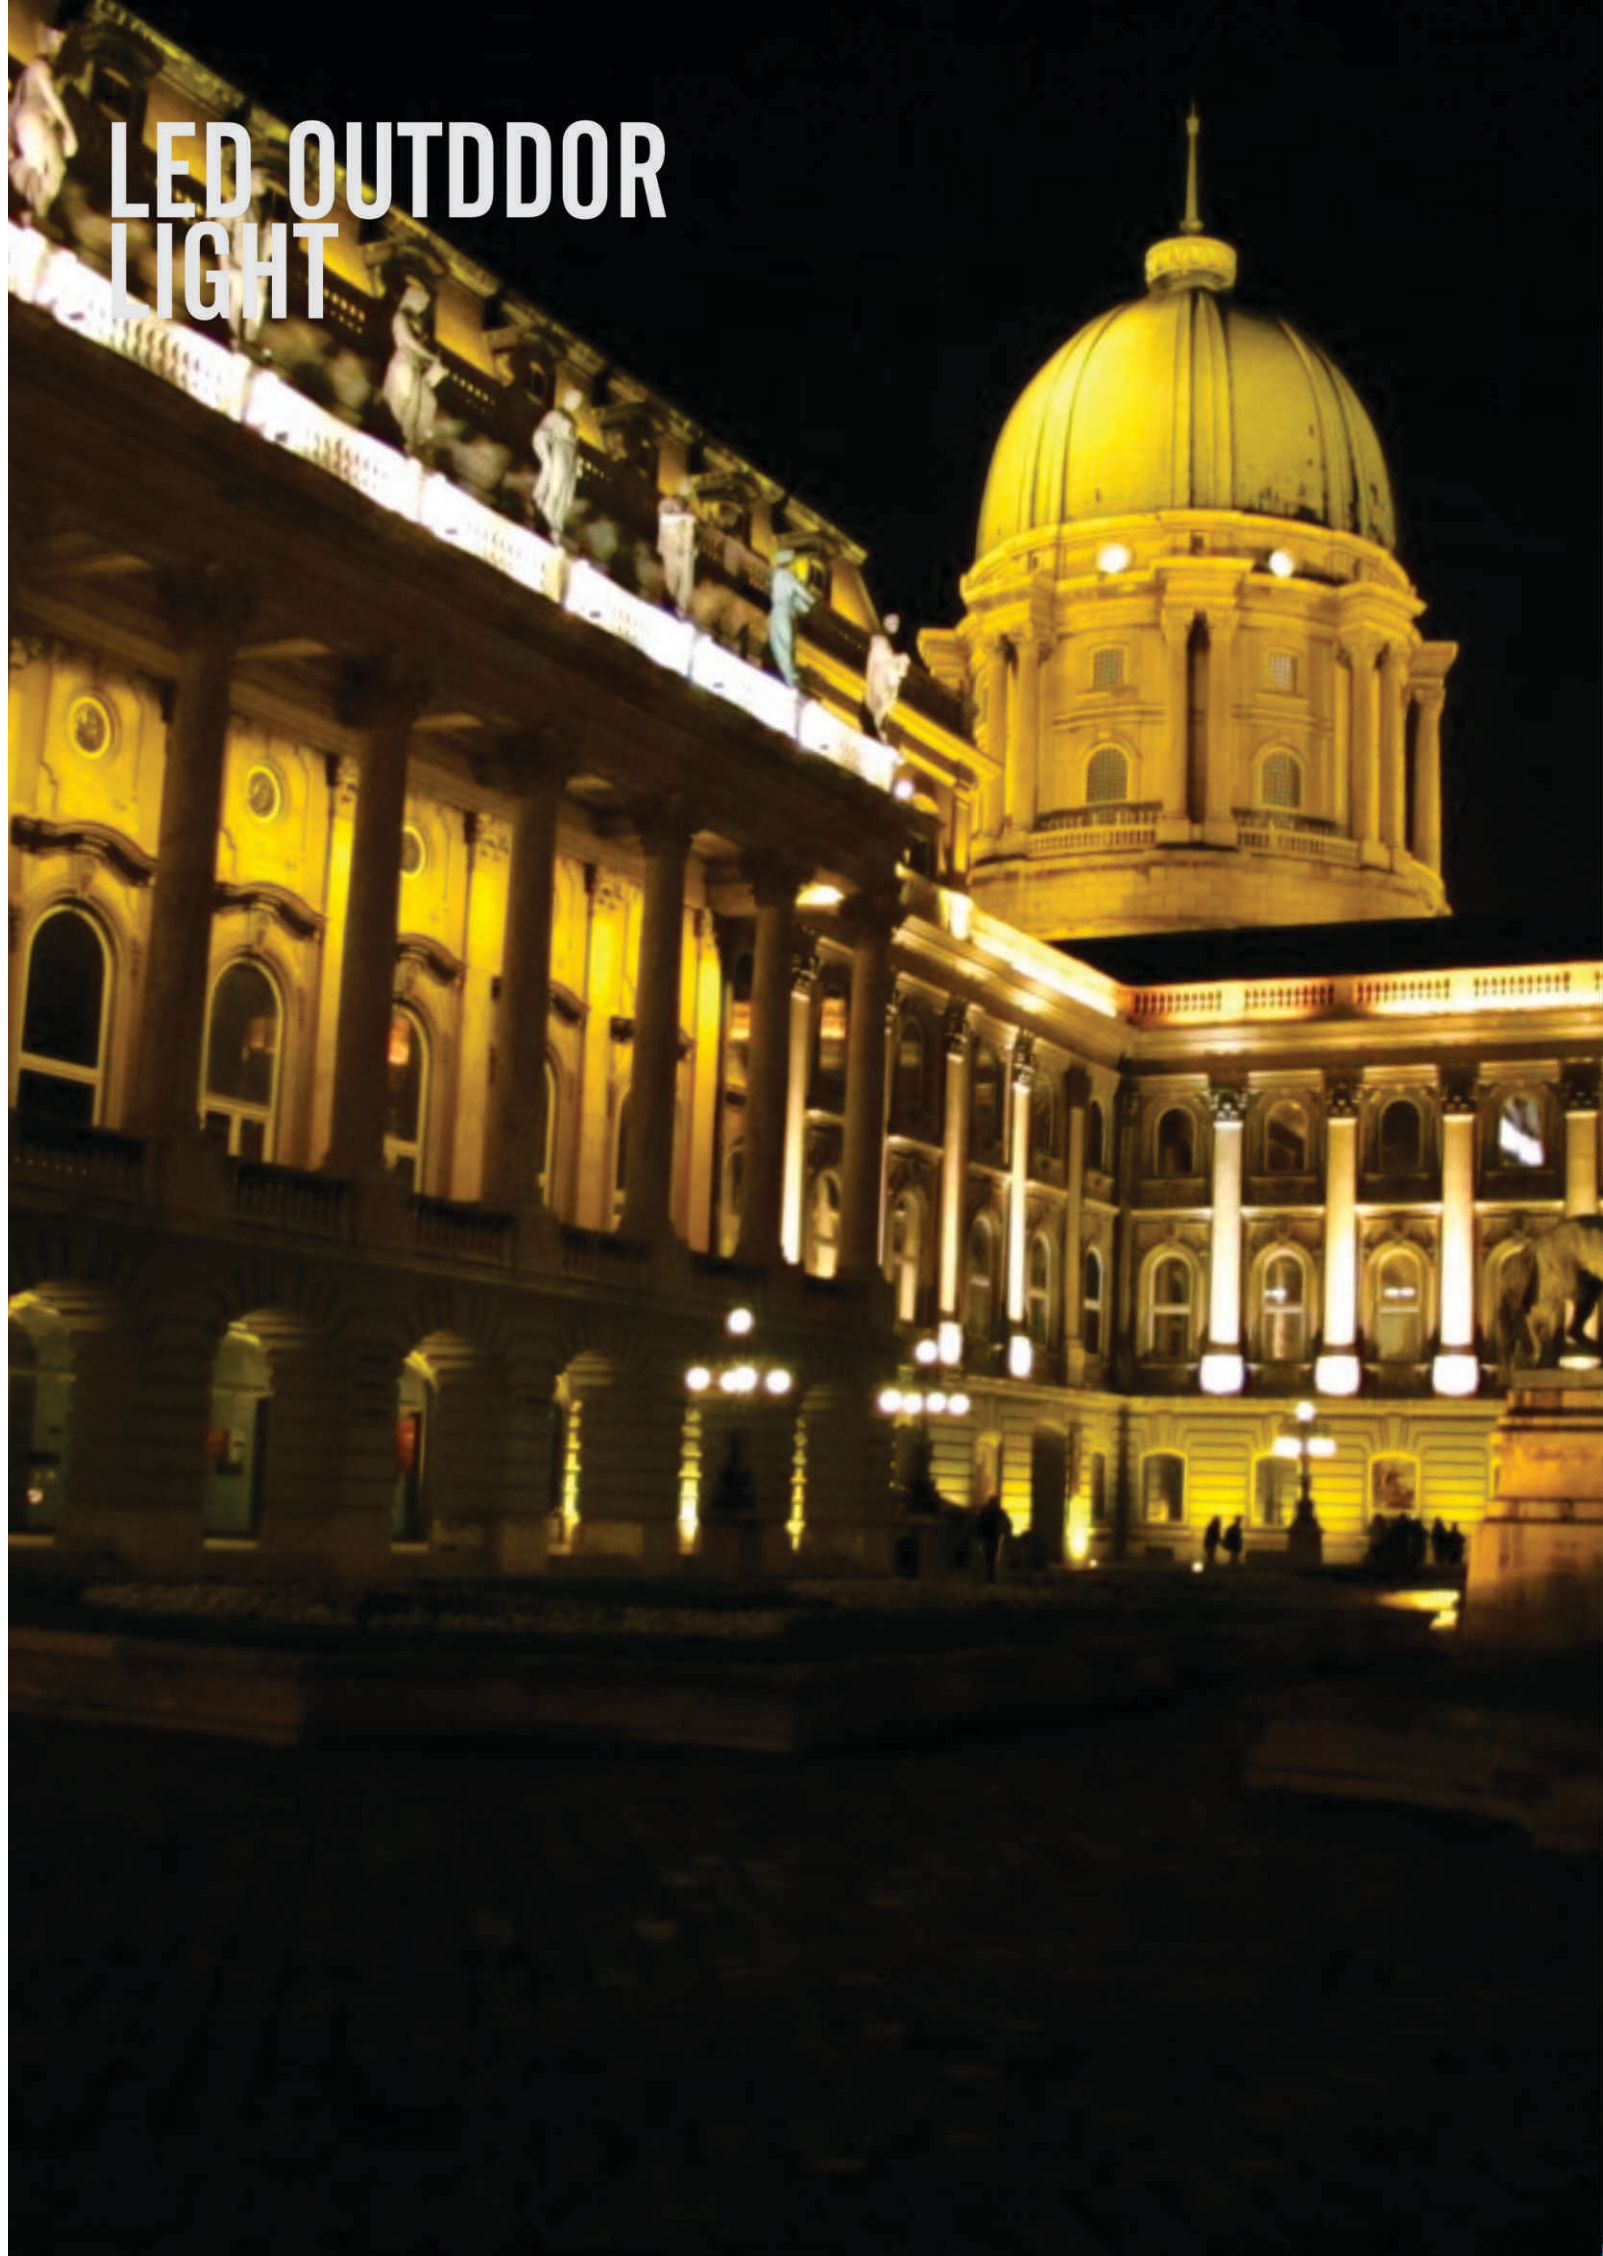

LED OUTDDOR LIGHT



SUPERIA Series

WATTAGE	30W	50W	100W	150W	200W
LUMEN	3600lm	6000lm	12000lm	18000lm	24000lm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>5KV				
INPUT VOLTAGE	100-280 Vac				

ALPHA Series

WATTAGE	50W	100W
LUMEN	6000lm	12000lm
DRIVER EFFICIENCY	>90%	>90%
SURGE PROTECTION	>5KV	>5KV
INPUT VOLTAGE	100-280 Vac	100-280 Vac
IP	IP66	IP66
ANGLE	120	120



LED STREET LIGHT



LED STREET LIGHT



CRYSTA

WATTAGE	15W	24W	30W	50W
LUMEN	1500lm	2400lm	3000lm	5000lm
PIPE DIE	40mm	55mm	60mm	60mm
DRIVER EFFICIENCY	>90%			
SURGE PROTECTION	>4KV			
INPUT VOLTAGE	100-280 Vac			

GRACE

WATTAGE	30W	50W	100W
LUMEN	3000lm	5000lm	10000lm
PIPE DIE	50mm	50mm	60mm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>6KV		
INPUT VOLTAGE	100-280 Vac		

SAFARI

WATTAGE	15W	24W	30W
LUMEN	1500lm	2400lm	3000lm
PIPE DIE	40mm	40mm	40mm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>4KV		
INPUT VOLTAGE	100-280 Vac		

SUPREME

WATTAGE	50W	72W	100W	120W	150W
LUMEN	5000lm	7200lm	10000lm	12000lm	15000lm
PIPE DIE	40mm	55mm	60mm	60mm	60mm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>6KV				
INPUT VOLTAGE	100-280 Vac				

FEATURES

- IP- 65 Aluminium die cast enclosure, Epoxy powder coated.
- Heat Resistant, Half Toughened Glass
- High Glow (Philips) LED & Built in Led Driver for constant current optimum performance
- Energy Efficient, High power factor & Low THD
- High Tensile SS- 304 Hardware/ MS Hardware with zinc plating ROHS 3rd generation Passivation
- As per IS 10322
- Note: Sensor available on demand



PROTECTION

- Over Voltage Protection
- Short Circuit Protection
- Open Circuit Protection
- Surge Protection= 6kv IEC 61000-4-5

SOLAR STREET LIGHT SERIES



SAFARI



CRYSTA

TECHNICAL SPECIFICATION

WATTAGE	9W	12W	18W	24W	36W
LUMEN	900lm	1200lm	1800lm	2400lm	3600lm
PIPE DIE	40mm	40mm	40mm	40mm	40mm
DRIVER EFFICIENCY	>90%				
SURGE PROTECTION	>4KV				
INPUT VOLTAGE	12V DC Battery				

FEATURES

- IP- 66 Aluminium die cast enclosure, Epoxy powder coated.
- Heat Resistant, Half Toughened Glass
- High Glow (Philips) LED & Built in Led Driver for constant current optimum performance
- Energy Efficient, High power factor & Low THD
- High Tensile SS- 304 Hardware/ MS Hardware with zinc plating ROHS 3rd generation Passivation
- As per IS 10322
- Note: Sensor available on demand

PROTECTION

- Over Voltage Protection
- Short Circuit Protection
- Open Circuit Protection
- Surge Protection= 6kv IEC 61000-4-5



HIBAY Series



TECHNICAL SPECIFICATION

WATTAGE	50W	100W	150W
BEAM ANGLE	60* With Optical Lens and Reflector		
LUMEN	4500mm	9000mm	13500mm
DRIVER EFFICIENCY	>90%		
SURGE PROTECTION	>6KV		
INPUT VOLTAGE	110-300 Vac		

PROTECTION

- Over Voltage Protection
- Short Circuit Protection
- Open Circuit Protection
- Surge Protection= >6kv IEC 61000-4-5

